

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 June 2005 (23.06.2005)

PCT

(10) International Publication Number
WO 2005/057105 A1

(51) International Patent Classification⁷: **F25D 23/00**

(74) Agent: **WOORIN PATENT FIRM**; 2nd Floor, Shinwon Bldg., 823-14 Yeoksam-dong, Kangnam-gu, Seoul City 135-080 (KR).

(21) International Application Number:
PCT/KR2004/000608

(22) International Filing Date: 19 March 2004 (19.03.2004)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2003-0091588
15 December 2003 (15.12.2003) KR

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-Dong, Youngdungpo-Gu, Seoul City 150-721 (KR).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **OH, Seung-Jin** [KR/KR]; 302-1501, Hanyang Sanho Apt., Eupne-dong, Bukgu, Daegu City 702-200 (KR).

[Continued on next page]

(54) Title: COMMUNICATION PAD MOUNTING STRUCTURE OF REFRIGERATOR

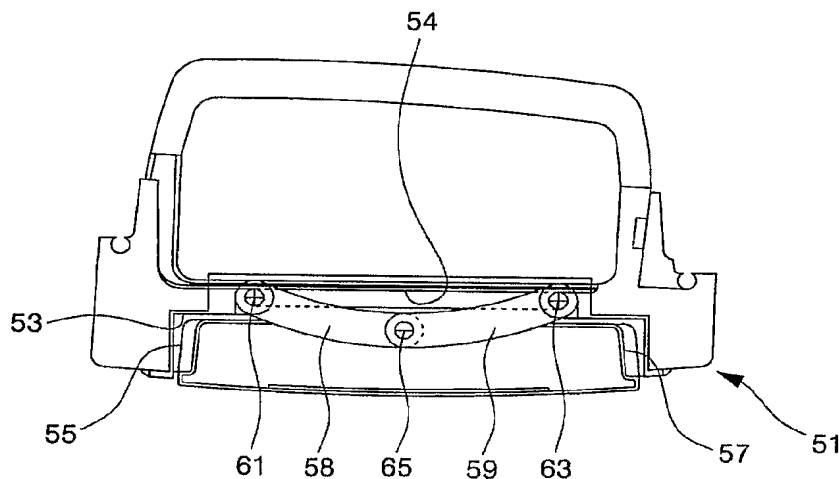

(57) Abstract: There is a problem in that it is inconvenient to use a conventional communication pad (17) since a user cannot diversely adjust a direction of the communication pad. The present invention relates to a communication pad mounting structure of a refrigerator. In the present invention, a front of a door (51) of a refrigerator is formed with a seating space (53). The upper and lower portions of the seating space (53) are formed with slots (54) elongated from side to side, respectively. The holder (57) for supporting a communication pad (55) is mounted in the seating space (53) tiltably from side to side. To this end, there are provided a pair of links (58) and (59), wherein an end of the links is connected to the slot to pivot and move along each slot (54), and the other end of each of the links is pivotably connected to a side of each of the upper and lower surfaces of the holder (57). According to the present invention with such a structure, the communication pad which is supported by the holder can be tilted to a desired position according to a position of the user.

WO 2005/057105 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.